

## X-15P



A 15" versatile and hard glass-protected display featuring Advanced Image Platform™ technology and metal housing delivers enduring performance for professional environments.

The X-15P presents authentic colours and contrast with its Advanced Image Platform™ (AIP) technology. 5,000,000:1 dynamic contrast ratio allows delivering sharp images. Integrated with NeoV™ Optical Glass to protect the panel from water, dust and incidental damage, built-in video support and robust metal casing, the X-15P is a durable display and an ideal choice for multi-user environments where space is at a premium.

- > NeoV™ Optical Glass
- > AIP technology: PIP and PBP functions; Built-in Image Enhancer
- > High 350 cd/m<sup>2</sup> brightness
- > Crisp 5,000,000:1 dynamic contrast ratio
- > EcoSmart Sensor automatically adjusts backlight according to ambient lighting condition
- > Built-in speakers (1.5W x 2)
- > Black-level alignment
- > Durable metal housing
- > VESA standard wall mount
- > Rigorous screening of the components for mission-critical 24/7 applications



NeoV™ Optical Glass - The most trusted hard glass protection available. Only on AG Neovo displays



# X-15P

## Specifications

## X-15P

Panel	Panel Type	LED-Backlit TFT LCD
	Panel Size	15.0"
	Max. Resolution	XGA 1024 x 768
	Pixel Pitch	0.297 mm
	Brightness	350 cd/m <sup>2</sup> (Typical)
	Contrast Ratio	700:1 (Typical)
	Viewing Angle (H/V)	170°/160° (Typical)
	Display Colour	16.7M
	Response Time	4 ms (GTG)
Frequency (H/V)		H: 24 kHz - 81 kHz V: 50 Hz - 75 Hz
Input	Analogue	15-Pin D-Sub
	Digital	24-Pin DVI-D
	S-Video	4-Pin Mini DIN
	CVBS	RCA
Audio	Audio In	1 x stereo audio in for PC (audio jack, 3.5 Ø) 1 x stereo audio in for CVBS or S-Video (RCA)
	Speaker	1.5W x 2
Power	Power Supply	External
	Power Requirements	DC 12V
	Consumption	< 17 W (on) < 0.5 W (Stand-by) < 0.5 W (Off)
NeoV™ Optical Glass	Thickness	3.0 mm (0.18")
	Reflection Rate	< 2%
	Transmission Rate	> 96%
	Coating Hardness	> 8H
Plug & Play	VESA	DCC 2B, DCC/CI
Operating Conditions	Temperature	0 °C ~ 40 °C
	Humidity	10% ~ 90%
Storage Conditions	Temperature	-20 °C ~ 60 °C
	Humidity	5% ~ 95%
Mounting	VESA FPMPMI	Yes (100 x 100mm & 75 x 75mm)
Tilt	Tilt	0° ~ +20°
Dimensions	Product (W x H x D)	380 x 359 x 155 mm (15.0" x 14.1" x 6.1")
	Packaging (W x H x D)	454 x 422 x 190 mm (17.9" x 16.6" x 7.5")
Weight	Product Weight	4.7 kg (10.4 lbs)
	Packaged Product Weight	6.3 kg (13.9 lbs)
Regulation Approval	Certifications & Compliance	CB, FCC, CE, WEEE, RoHS, REACH
Accessories	Supplied	CD ROM (user manual), power cord, power adaptor, 15-Pin D-Sub cable, audio cable, warranty card



NeoV™ Optical Glass and durable metal casing for water, dust and scratch resistance




Flexible image viewing options such as PIP/PBP, freeze, 180° image rotation



Front-panel keypad with Input Select, Screen Menu, Contrast and Brightness controls for quick adjustments



Wide range of I/O connectors for flexibility and expandability in video installations

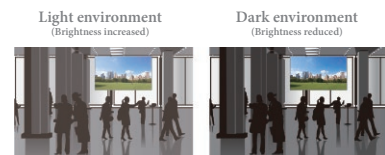

EcoSmart Sensor auto adjusts brightness for ultra low power consumption

